


Please read all instructions carefully before use. You may also view a digital version of these instructions at www.e-tintproducts.com.


INSTALLATION

1. Choose a dry and dust free place for installation. Remove the faceshield from your helmet. Thoroughly clean and dry the entire faceshield (outside and inside) per manufacturer's instructions, or with a mild detergent and water. Remove all fingerprints, grease residues, dirt, and moisture.
2. Reinstall the face shield to your helmet. Be careful to avoid touching the inside of the faceshield or the inside surface of the insert, in order to keep both free of fingerprints.
3. Peel the vinyl installation template from its backing. With your helmet faceshield down and fully closed, center the installation template on the outside surface of the faceshield. Align the template within the perimeter of the helmet portal so that it fits within the opening (**Diagram 1**).
4. Leaving the vinyl installation template in place, remove the faceshield from the helmet. Set it face down on a soft surface. Avoid contact with the inside surface of the faceshield to keep it free of smudges or fingerprints.
5. Carefully peel the Akari® AX12 insert from the clear liner (**Diagram 2**).
6. Hold the AX12 insert by the edges of the adhesive vinyl and gently bend into a "U" shape. Align the crosshairs of the visor insert with the crosshairs of the vinyl installation template (**Diagram 3**). When correctly positioned, gently apply the AX12 insert to your faceshield.
7. Moving from the center outwards, mount the insert by pressing along the vinyl border. Do NOT PRESS ON THE LIQUID CRYSTAL VIEWING AREA (**Diagram 4**). The vinyl border should be adhered flush against the faceshield. A gap between the liquid crystal viewing area and the faceshield will be expected.
8. Gently peel the clear installation template off of the AX12 (**Diagram 5**). Remove the vinyl installation template from the outside of the faceshield. NOTE: It is recommended to save the installation templates if you feel you will transfer your Akari® AX12 to another faceshield at a later time.
9. To connect the AX12 button, first remove the adhesive liner from the back of the flexible ribbon. Next, snap the connector at the end of the ribbon onto the connection point of the AX12 insert (**Diagram 6**). Wrap the ribbon under the faceshield and remove the liner from the back of the AX12 button. If there is extra length of the ribbon hanging loose, you may shorten it by folding a small section and pressing the extra length onto the back of the adhesive foam (**Diagram 7**).
10. CAUTION! Once mounted, the AX12 button is intended to be permanent. You may not reposition or transfer the button once it is mounted to your faceshield. Doing so may cause permanent damage to the button and will require a replacement. Horizontally mount the button on the outside surface of the faceshield. The button should NOT overhang the faceshield (**Diagram 8**). Press the button firmly into place to ensure solid adhesion. Secure the flex into place by pressing it onto the faceshield.
11. Reinstall the faceshield to your helmet. Before operating in automatic mode, test the insert to make sure the light threshold is set to your desired comfort level. See "Directions of Use" to set a custom light threshold.
12. Charge the insert by using the supplied Micro-USB cable. See additional charging information below.

TO TRANSFER THE INSERT: Unplug the button from the AX12 insert. Starting with the tab on the edge of the insert, gently peel the AX12 from your faceshield. Follow directions (1-8) above to re-install the insert onto your faceshield. NOTE: The AX12 insert may be removed and transferred to a new faceshield, although the AX12 button is not transferrable. You may purchase a replacement AX12 button by visiting your local dealer or www.e-tintproducts.com.

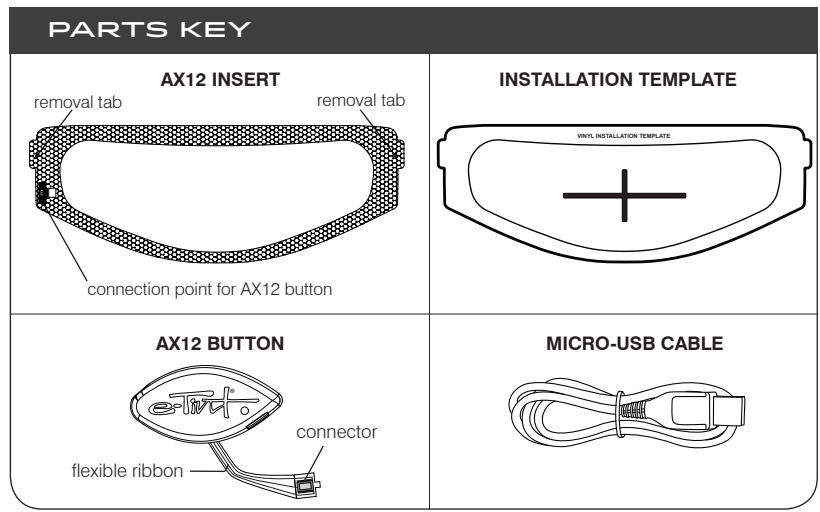

INSTALLATION DIAGRAMS

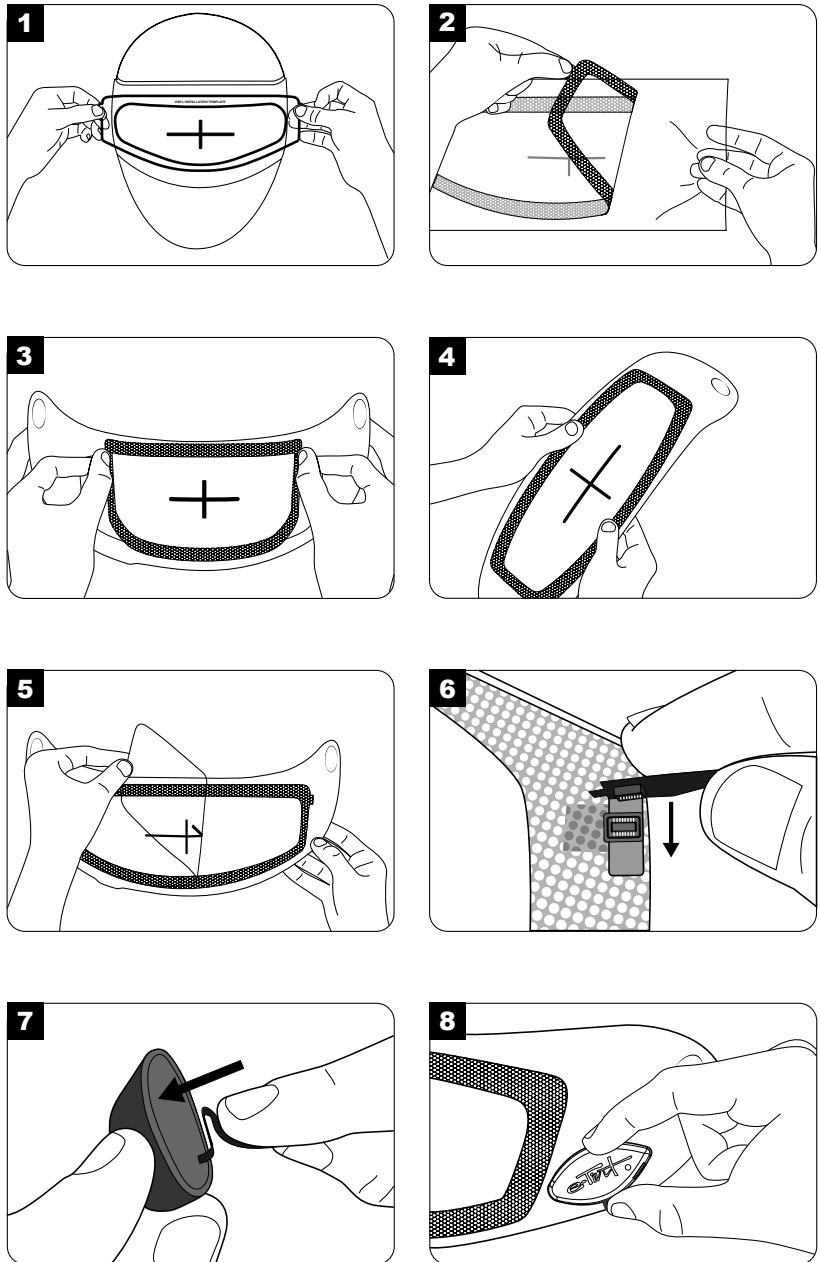

DIRECTIONS OF USE

GLOSSARY OF TERMS

ACTIVATE: Turn on; tint | DEACTIVATE: Turn off; clear

The Akari® AX12 insert changes instantly between two levels of tint (on or off) by either a quick touch of the button, or automatically via the built-in light sensor. These tint levels are fixed and cannot be adjusted by the user. The insert comes programmed with a standard light threshold setting for use in automatic mode. You have the option to reprogram the light threshold if you determine that it does not automatically activate or deactivate to your liking.

TO OPERATE IN MANUAL MODE: Simply press and release the button to activate or deactivate the tint of the insert.

TO OPERATE IN AUTOMATIC MODE: Press and hold the button for approximately three (3) seconds. The insert will flash three (3) times to indicate it has now switched to automatic mode. Release the button. The insert is now set for automatic use.

TO EXIT AUTOMATIC MODE (AND ENTER MANUAL MODE): Click the button once to go back to manual mode. The lens will go clear upon exiting automatic mode.

TO ADJUST THE LIGHT THRESHOLD: First, set the insert to automatic mode. Choose an ambient area of light that would be similar to what you would be riding in and where you would prefer the insert to activate. Hold the faceshield (with the insert installed) in your desired lighting condition and press & hold the button for approximately six (6) seconds. After six seconds, the insert will flash to indicate the system has re-calibrated its sensor to your desired light threshold. Light that is as bright as, or brighter than, the selected ambient lighting will now trigger the sensor. The electronics will store this custom threshold until it is either re-programmed or reset to its factory setting. **NOTE: Be sure to keep the area around the photo sensor (on top of the button) clear and open to the light source. If your finger is covering the light sensor while setting the light threshold, it will result in an insert that is activated most of the time and only switches when it is very dark. Do NOT attempt to change the light threshold when moving.**

FOR A FACTORY RESET: Press and hold the button for approximately twelve (12) seconds. The insert will cycle through two (2) sets of flashing to indicate the factory reset is complete.

TO CHARGE: Connect the micro-USB cable into the AX12 button and charge from either a computer or wall adapter. The insert will activate as it is being charged and the button will be inoperable. When the AX12 is fully charged it will deactivate. A fully depleted battery will take at least two (2) hours to completely charge. A fully charged AX12 may have up to forty (40) hours of tinted use. When fully charged, deactivated, and not used, the AX12 may stay charged for up to three (3) weeks. **NOTE: Do NOT store the AX12 connected to a charging source. Batteries may be damaged if stored for prolonged periods without charging. E-Tint recommends fully recharging the battery every two months if stored for a prolonged period of time. The environmental temperature also affects the storage life of any battery. Cool environments are best.**

WARNING! IT IS YOUR RESPONSIBILITY TO DETERMINE THE SUITABILITY OF THIS PRODUCT FOR ITS INTENDED USE, AND YOU USE THIS PRODUCT AT YOUR OWN RISK. IF AT ANY TIME YOU BELIEVE THAT THE AKARI® MOTORCYCLE INSERT IS NOT PERFORMING PROPERLY, DISCONTINUE USE OF THE INSERT AT ONCE. E-TINT, LLC PROVIDES YOU WITH A ONE (1) YEAR REPLACEMENT WARRANTY ON DEFECTIVE INSERTS WITH PROOF OF PURCHASE. E-TINT DISCLAIMS ANY AND ALL OTHER WARRANTIES OF ANY KIND. AKARI® INSERTS ARE NOT RECOMMENDED FOR FACESHIELDS MANUFACTURED WITH SEVERE COMPOUND CURVES. THIS PRODUCT IS NOT RECOMMENDED FOR USE AT NIGHT OR IN TEMPERATURES BELOW -10°C (14°F) OR ABOVE 45°C (113°F). USE AT YOUR OWN DISCRETION.

CLEANING & CARE

Clean with warm water, mild detergent, and a micro-fiber cloth. For stubborn residues clean with a household glass cleaner. Do not use cleaners which contain moisturizers, abrasives, strong acids, or caustics. Do not immerse the insert or electronics in liquids as this may impact the function of the insert. Do not leave this product in direct sunlight when not in use. Doing so will degrade the longevity of your insert.

PRODUCT DISPOSAL

Your AX12 visor insert must be disposed of properly according to local laws and regulations. Because this product contains a lithium battery, it must be disposed of separately from household waste. When your Akari® AX12 reaches the end of its life, contact local authorities to learn about recycling options.

RETURN POLICY

If you need warranty/repair service, first you should contact the retailer who sold you the product and verify the services he/she can provide. If this is not possible, we will be happy to assist you!

You may return any new, unopened product for a full refund or exchange within (30) days of purchase. Special order returns are at our discretion. The total refund amount is for the cost of

your product, excluding shipping. Please contact Customer Support at support@e-tintproducts.com or by visiting www.e-tintproducts.com/customer-support for a Return Merchandise Authorization (RMA) number and specific shipping instructions. Products returned for full refund must be in new condition and in original packaging (including all accessories that were included with the product), and returned to us within 30 calendar days of the issuance of the RMA. A 15% restocking fee may be charged for any accessories or components missing from the returned product. A purchase receipt **MUST** be provided with the return of any product. Products returned without an RMA will not be eligible for a refund or exchange. The shipping and duty charges for returning a product are the customer's responsibility.

Although we do not require you to register your new product, it is important to keep the following information to obtain warranty service. In the event that you would like to file a claim, e-Tint Customer Service **will require:**

- **LOT NO.** Next to the UPC code
- **SKU NO.** Next to the UPC code
- **ORIGINAL PURCHASE RECEIPT**
- **FIRST & LAST NAME**
- **TELEPHONE NUMBER**
- **EMAIL & SHIPPING ADDRESS**

LIMITED WARRANTY

E-Tint is 100% committed to creating the best performance products in the industry and we are always interested in receiving input from our valued customers. If you experience a problem with one of our products we want to know about it.

All Akari® products are warranted for a period of ONE year from date of purchase against any defects in materials and workmanship. If you find a defect within one (1) year after purchase, we kindly request you return your product to E-Tint. We will then evaluate your claim and, based on our findings and at our option, repair or replace any Akari® product that does not conform to the Limited Warranty.

In order to obtain limited warranty service, the following procedures must be followed: Contact E-Tint Customer Support for an RMA (Return Merchandise Authorization) number, and specific return and shipping instructions. The Akari® product must be returned with a purchase receipt for warranty service. Products returned to E-Tint without notification will not be eligible for limited warranty service. If the product does not conform to the Limited Warranty, the shipping and duty charges for returning the product are the responsibility of E-Tint.

Online Auction Purchases: Products purchased through online auctions (this does not apply to purchases made on www.e-tintproducts.com) are not eligible for warranty coverage. Online auction confirmations are not accepted for warranty verification. To obtain warranty service, an original or copy of the sales receipt from the original retailer is required. E-Tint will not replace missing components from any package purchased through an online auction.

EXCLUSIONS

The Limited Warranty set forth above applies only to Akari® products manufactured by or for E-Tint, LLC, and that bear the "Akari" trademark, trade name, or logo. The Limited Warranty does not apply to any non-Akari® products or any helmet visor or face shield, even if packaged or sold with an Akari® product. Manufacturers or suppliers, other than E-Tint, may provide their own warranties to the end user purchaser. Please check the relevant packaging for any relevant third party warranty information.

The Return Policy and Limited Warranty does not apply: (a) to consumable parts, such as batteries, unless damage has occurred due to a defect in materials or workmanship; (b) to damage caused by accident, abuse, misuse, flood, fire, earthquake or other external causes; (c) to damage caused by operating the product outside the permitted or intended uses described by E-Tint; (d) to damage caused by ordinary wear and tear; (e) to damage caused by service or repair performed by anyone who is not a representative of E-Tint; or (e) to damage arising from failure to follow instructions relating to the product's use or installation.

EXCEPT AS SET FORTH IN THE LIMITED WARRANTY, ALL PRODUCTS AND SERVICES MADE AVAILABLE TO YOU BY E-TINT ARE PROVIDED ON AN "AS IS" AND "AS AVAILABLE" BASIS. TO THE FULLEST EXTENT PERMITTED BY APPLICABLE LAW, E-TINT EXPRESSLY DISCLAIMS ALL OTHER WARRANTIES OF ANY KIND, WHETHER EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR PARTICULAR PURPOSE, TITLE AND NON-INFRINGEMENT, WITH RESPECT TO ALL PRODUCTS AND SERVICES MADE AVAILABLE TO YOU BY E-TINT. NO INFORMATION OR ADVICE OBTAINED THROUGH THE E-TINT WEBSITE, OR ANY OTHER AFFIRMATION OF E-TINT, BY WORDS OR ACTIONS, SHALL CONSTITUTE A WARRANTY. IN NO EVENT SHALL E-TINT' LIABILITY IN CONNECTION WITH ANY PRODUCT OR SERVICE MADE AVAILABLE TO YOU BY E-TINT EXCEED THE AMOUNT ACTUALLY PAID BY YOU TO E-TINT FOR ANY SUCH PRODUCT OR SERVICE. IN NO EVENT SHALL E-TINT BE LIABLE FOR ANY INDIRECT, INCIDENTAL, CONSEQUENTIAL, OR SPECIAL DAMAGES ARISING OUT OF OR IN CONNECTION WITH ANY PRODUCT OR SERVICE MADE AVAILABLE BY E-TINT. SOME JURISDICTIONS DO NOT ALLOW THE EXCLUSION OF CERTAIN WARRANTIES OR THE LIMITATION OR EXCLUSION OF LIABILITY FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES. ACCORDINGLY, THOSE PROVISIONS SET FORTH ABOVE MAY NOT APPLY TO YOU.

E-TINT, LLC (USA) | 1950 RTE 59, STE 100 Kent, OH 44240
T (877) 451-5937 | F (330) 676-0649 | www.e-tintproducts.com



AMI POWERSPORTS EUROPE | Via Parsubio, 76/2 40133 | Bologna, Italia
www.amipowersports.eu